


DATASHEET
21GC MULTI-COMM HUB
PN: 21GC.H.S12-01

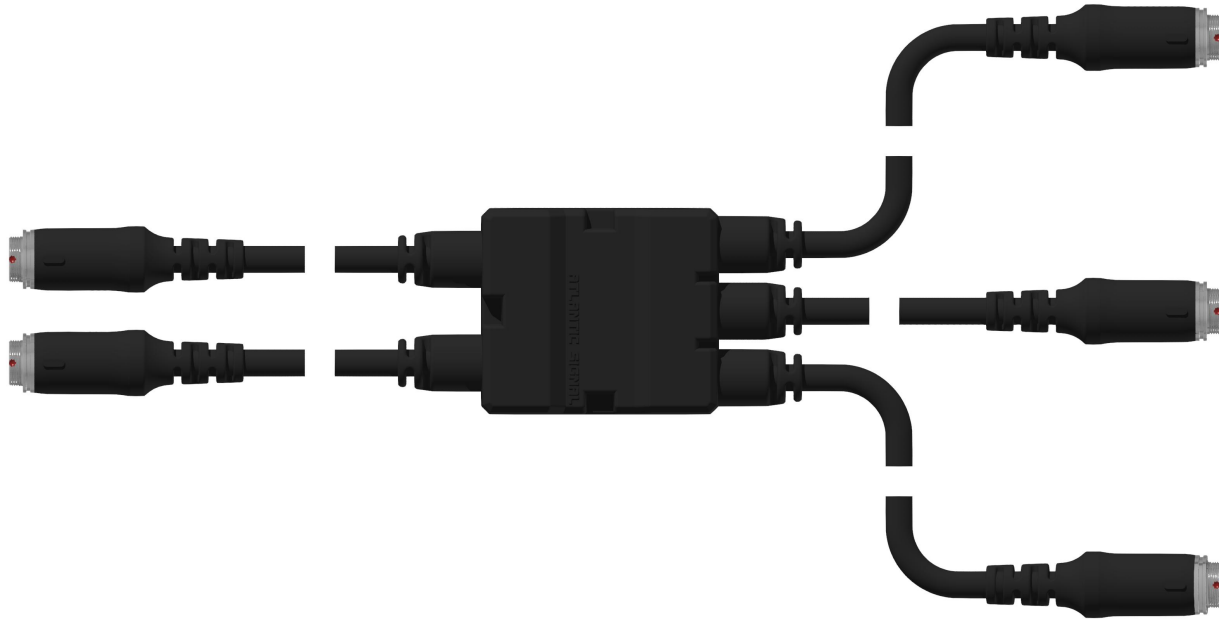

Comm Ports:	x2 ODU Size 0HD Blue Jack (Radio) x1 ODU Size 0HD Blue Jack (ICS) (Push-Pull / Screw-Lock)	Cable Lengths:	ICS - 18.00" SW,HS - 5.00" RAD - 5.00"
Headset Port:	x1 ODU Size 0HD Red Jack (Push-Pull / Screw-Lock)	Core Dimensions:	2.81 x 1.75 x .562
Switch Port:	x1 ODU Size 00HD Tan Jack (Push-Pull / Screw-Lock)	Immersion Rating:	10m / 10hrs
Channels:	x5 Comm Channels	Power Requirements:	4.5v Min - 36v Max
Cable Ratings:	Temp: -40° to 90°C Voltage: 30V	RF Immunity Level:	High
Outer Jacket:	Polyurethane: Flame Retardant Black (matte)	Cross Talk Immunity Level:	High
Overmold Material:	TPE Black (matte)	Compatible with:	-Standard & Dual Net Radios -21GC Series Cables
ECCN:	5A991	Compatible Headsets:	-Comtac V & VI -Below H2O (Atlantic Signal)

North America: 1-800-850-8512
International: 1-785-582-5823

Email: Support@atlanticsignal.com
Web: www.atlanticsignal.com

1221 S Kansas Ave
Topeka, KS 66612